

# Příslušenství pro tlakové vodní čističky

	Připojení	KJ-1590*	KJ-2200	KJ-3000
1/8" x 15 m tlaková hadice	1/8"	47602	47602	47602
1/8" x 23 m tlaková hadice	1/8"	49272	49272	49272
1/4" x 10 m tlaková mycí hadice	1/4"	51572	51572	—
1/4" x 15 m tlaková hadice	1/4"	47607	47607	—
1/4" x 33 m tlaková hadice	1/4"	51587	51587	—
1/4" x 45 m tlaková hadice	1/4"	49487	49487	—
1/4" x 60 m tlaková hadice	1/4"	51597	51597	—
3/8" x 15 m tlaková mycí hadice	1/4"	—	—	64832
3/8" x 30 m tlaková hadice	1/4"	—	—	64837
3/8" x 45 m tlaková hadice	1/4"	—	—	64842
3/8" x 60 m tlaková hadice	1/4"	—	—	64847
3/8" x 90 m tlaková hadice	1/4"	—	—	64857
Naváděcí hadice 1/8"	1/4"	50002	50002	—
Naváděcí hadice 1/4"	1/4"	50007	50007	—
Vozík H-30 s hadicí 1/4" x 33 m	1/4"	62877	62877	—
Vozík H-38 s hadicí 3/8" x 61 m	1/4"	—	—	64902
Jet Vac	1/4"	—	67187	67187

	KJ-1590**	KJ-2200	KJ-3000
Souprava pro venkovní tlakové mytí	62887*	64077	—
Tlakové mycí pistole (pouze)	64702*	64767	64797
Nožní spínač	48157	48157	48157
Tlaková hadice s rychlospojkou	66732	66732	66732
Zimní souprava	48367	48367	48367
Nástroj na čištění trysek	47542	47542	47542

Jet Vac na odstranění kapalin a drobných usazenin ze zatopených základů, bazénů, staveníšť a pod.



\* Příslušenství pro KJ-1590 II viz stranu 158.

\*\* Pro KJ-1590 i pro KJ-1590 II.

## Trysky tlakových vodních čističek



### Hnací trysky

- Trysky pro obecné použití, které pracují dobře ve většině aplikací. Mají tři zpětné tryskové otvory pro maximální pohon na dlouhé vzdálenosti.



### Vysoce výkonné trysky

- Trysky pro obecné použití, které pracují dobře ve většině aplikací. Mají tři zpětné tryskové otvory pro maximální pohon na dlouhé vzdálenosti.



### Pronikací trysky

- Pronikací trysky mají navíc jeden dopředu směřující tryskový otvor, který prostříkává otvory v ucpávkách. Pohon zajišťují tři zpětné tryskové otvory.



### Rotační / turbo tryska

- Tato tryska rotuje a dosahuje mimořádného čistícího výkonu.



### Kořenová řezná tryska 3000

- Pro použití v tukových, kalových, bahnových a kořenových překážkách.
- Je schopná řezat kořeny. Síla zpětného tryskového otvoru vytváří silný, soustředěný proud vody, který dokáže odstránit čistě kořeny od stěny odpadu.
- Zpětný tryskový otvor turbo. Určen k důkladnému odstranění inkrustů a usazenin ze stěn odpadu.
- Zašpičatělá hlava trysky. Je určena k snazšímu pronikání trysky ucpávkou, aby zadní trysky mohly odpad úplně vyčistit.
- Chlazená vodou. Pro údržbu nejsou třeba žádné tuky nebo oleje.
- Zůstává po ní hladký povrch. Odpad zůstává déle čistý a nemusí se tak často znovu čistit.
- Pro potrubí 100 - 200 mm.



### Kloubová tryska

- Umožňuje hadici tlakové vodní čističky překonávat obtížné oblouky a sifony. Pohon zajišťují tři zpětné tryskové otvory.

### Trysky

	KJ-1590**	KJ-2200	KJ-3000
Hnací tryska 1/8"	64802	64772	64802
Pronikací tryska 1/8"	64807	64777	64807
Kloubová tryska 1/8"	64812	64782	64812
Vysoce výkonná tryska 1/8"	58426	—	—
Hnací tryska 1/4"	58436	64787	64817
Pronikací tryska 1/4"	58446	64792	64822
Rotační tryska 1/8"	—	82842	—
Rotační tryska 1/8"	—	—	82847
Rotační tryska 1/4"	58416	—	—
Rotační tryska 1/4"	—	82852	—
Rotační tryska 1/4"	—	—	82857
Kořenová řezná tryska	—	—	16713

\*\* Pro KJ-1590 i pro KJ-1590 II.



# ROJET High-Pressure Pipe & Drain Cleaning Nozzles




## Standard Nozzle

Made of VA steel

Suitable for the removal of obstructions or for flushing pipes and drains

All-purpose standard nozzle:  
versatile – flexible – hard-working

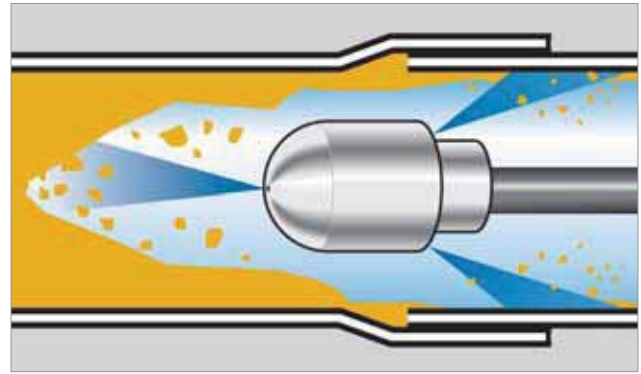

No. 7.7601

Description	Coupling	Ø x L mm	kg	No.
For ROJET 30/130	R 1/2"	30 x 50	0.12	<b>7.6135</b>
For ROJET 40/100	R 1/2"	30 x 50	0.12	<b>7.6141</b>
For ROJET 50/120	R 1/2"	30 x 50	0.12	<b>7.6137</b>
For ROJET 60/140	R 1/2"	30 x 50	0.12	<b>7.7606</b>
For ROJET 85/160	R 1/2"	30 x 50	0.12	<b>7.6152</b>
For ROJET 100/150	R 1/2"	30 x 50	0.12	<b>7.6140</b>
For ROJET 100/200	R 1/2"	30 x 50	0.12	<b>7.6144</b>
For ROJET 130/150	R 1/2"	30 x 50	0.12	<b>7.6488</b>
For ROJET 130/150	R 3/4"	40 x 60	0.12	<b>7.6406</b>

## Quattro 3-sided Nozzle

Made of VA steel

Support the quick removal of tough obstructions through ripping, cutting and drilling. Additionally, it can be used in cleaning away pipe pressing residues

- Nozzle with 3-sided point
- With 4 forward-facing high-pressure jets. (M5 grub screws)



No. 7.7613

Description	Coupling	Ø x L mm	kg	No.
For ROJET 30/130	R 1/2"	30 x 50	0.11	<b>7.7611</b>
For ROJET 40/100	R 1/2"	30 x 50	0.11	<b>7.7612</b>
For ROJET 50/120	R 1/2"	30 x 50	0.11	<b>7.7613</b>
For ROJET 60/140	R 1/2"	30 x 50	0.11	<b>7.7616</b>
For ROJET 85/160	R 1/2"	30 x 50	0.11	<b>7.7614</b>
For ROJET 100/150	R 1/2"	30 x 50	0.11	<b>7.7565</b>
For ROJET 100/200	R 1/2"	30 x 50	0.11	<b>7.7530</b>
For ROJET 130/150	R 1/2"	30 x 50	0.11	<b>7.6489</b>
For ROJET 130/150	R 3/4"	40 x 70	0.11	<b>7.6410</b>

## Rotating Nozzle

Made of VA steel

High-performance rotating nozzle that is especially suited for use in greasy pipes, for all-round cleaning before TV camera inspection for the removal of light deposits and roots.

It is also often used for basic cleaning before reconditioning.

- 4 different jet angles (propulsion part 25° / pipe 90°, 75° and 60°)
- All-round use
- Guarantees maximum cleaning performance



No. 7.7625

Description	Coupling	Ø x L mm	kg	No.
For ROJET 40/100	R 1/2"	30 x 50	0.55	<b>7.7622</b>
For ROJET 50/120	R 1/2"	30 x 50	0.55	<b>7.7623</b>
For ROJET 30/130	R 1/2"	30 x 50	0.55	<b>7.7621</b>
For ROJET 60/140	R 1/2"	30 x 50	0.55	<b>7.7626</b>
For ROJET 85/160	R 1/2"	30 x 50	0.55	<b>7.7624</b>
For ROJET 100/150	R 1/2"	30 x 50	0.55	<b>7.7566</b>
For ROJET 130/150	R 1/2"	30 x 50	0.55	<b>7.6492</b>
For ROJET 130/150	R 3/4"	40 x 110	0.55	<b>7.6427</b>

# ROJET High-Pressure Pipe & Drain Cleaning Nozzles

## Grenade Nozzle with Traction Jet

### Made of VA steel

Cleaning nozzle with a high cleaning efficiency for professional use in drains with a maximum diameter of 300 mm.

- Optimised water flow, flexible, with high power traction
- 2 different jet angles (M8 grub screws)

Description	Coupling	Ø x L mm	kg	No.
For ROJET 30/130	R 1/2"	60 x 95	0.136	<b>7.7631</b>
For ROJET 40/100	R 1/2"	60 x 95	0.136	<b>7.7632</b>
For ROJET 50/120	R 1/2"	60 x 95	0.136	<b>7.7633</b>
For ROJET 60/140	R 1/2"	60 x 95	0.136	<b>7.7636</b>
For ROJET 85/160	R 1/2"	60 x 95	0.136	<b>7.7634</b>
For ROJET 100/200	R 1/2"	60 x 95	0.136	<b>7.6172</b>
For ROJET 130/150	R 1/2"	60 x 95	0.136	<b>7.6490</b>
For ROJET 85/160 R 3/4" - R 1/2"	R 3/4" - R 1/2"	70 x 105	0.136	<b>7.6193</b>
For ROJET 100/150 R 3/4" - R 1/2"	R 3/4" - R 1/2"	70 x 105	0.136	<b>7.6194</b>
For ROJET 100/200 R 3/4" - R 1/2"	R 3/4" - R 1/2"	70 x 105	0.136	<b>7.6179</b>
For ROJET 130/150 R 3/4" - R 1/2"	R 3/4" - R 1/2"	70 x 105	0.136	<b>7.6416</b>



No. 7.7602

## Flat Nozzle

### Made of VA steel

The wedged-shaped flat nozzles main purpose is for bottom cleaning and the removal of sand and debris. Furthermore, the flat nozzle is excellent for negotiating large passages and transporting heavy residue.

- Utmost traction, light jetting effect (approx. 2")
- Demonstrative cleaning performance
- Optimum nozzle alignment (M 6 grub screws)

Description	Coupling	Ø x L mm	kg	No.
For ROJET 30/130	R 1/2"	70 x 120	2.95	<b>7.6170</b>
For ROJET 40/100	R 1/2"	70 x 120	2.95	<b>7.6157</b>
For ROJET 50/120	R 1/2"	70 x 120	2.95	<b>7.7643</b>
For ROJET 60/140	R 1/2"	70 x 120	2.95	<b>7.6233</b>
For ROJET 85/160	R 1/2"	70 x 120	2.95	<b>7.7644</b>
For ROJET 100/150	R 1/2"	70 x 120	2.95	<b>7.6234</b>
For ROJET 100/200	R 1/2"	70 x 120	2.95	<b>7.6161</b>
For ROJET 130/160	R 1/2"	70 x 120	2.95	<b>7.6235</b>
For ROJET 130/160	R 3/4"	100 x 160	2.95	<b>7.6236</b>



No. 7.7642

## Nozzle Assortment

### Professional nozzle sets for ROJET

The nozzle assortment that is arranged for the professional, ensures a wide range of use and guarantees effective cleaning.

Description	Coupling	kg	No.
For ROJET 30/130	R 1/2"	5.10	<b>7.6462</b>
For ROJET 40/100	R 1/2"	5.10	<b>7.6463</b>
For ROJET 50/120	R 1/2"	5.10	<b>7.6464</b>
For ROJET 60/140	R 1/2"	5.10	<b>7.7650</b>
For ROJET 85/160	R 1/2"	5.10	<b>7.6465</b>
For ROJET 100/150	R 1/2"	5.10	<b>7.6466</b>
For ROJET 100/200	R 1/2"	5.10	<b>7.6470</b>
For ROJET 130/160	R 1/2"	5.10	<b>7.6495</b>
For ROJET 130/160	R 3/4"	5.10	<b>7.6467</b>

### ACCESSORIES

Nozzle holder for nozzle assortment with 5 x 1/2"	50 x 370	1.28	<b>7.6309</b>
--	----------	------	---------------



Example for ROJET 40 / 100,  
Set No. 7.76304

# ROJET Accessories

## High-Pressure Hose

- Highly flexible
- Complete with couplings

Available with R1/4" and R1/2" couplings




Nominal diameter mm	Coupling	L m	kg	No.
8	R1/4"	40	9.4	<b>7.2820</b>
13	R1/2"	50	20.0	<b>7.6130</b>
13	R1/2"	80	52.0	<b>7.6131</b>
16	R1/2"	80	67.0	<b>7.6119</b>
Threaded couplings			kg	No.
For High-pressure hose DN 13 mm - R1/2" internal			0.21	<b>7.6133</b>
For High-pressure hose DN 13 mm - R1/2" external			0.21	<b>7.6134</b>

## Deflector Rollers

The use of deflector rollers reduces the wear and tear of high-pressure hoses and therefore extends the service life and helps to minimise costs



No. 7.7500

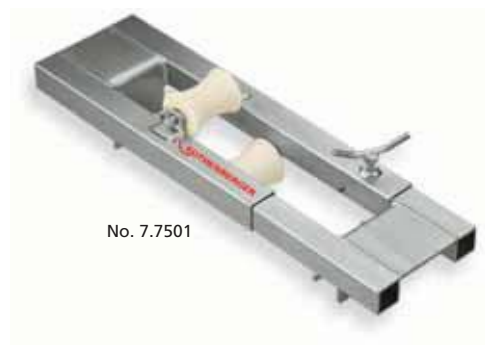

No. 7.7501

Description	kg	No.
For bottom manhole edge	6.2	<b>7.7500</b>
For bottom manhole edge	5.0	<b>7.7501</b>

## High-Pressure Cleaning Lance

The built-in ROJET pressure selection valve enables use with a cleaning lance

- Complete with R 1/2" threaded coupling
- Flat jet nozzle insert for channel, surface and component cleaning. Included in delivery



No. 7.6187



No. 7.6189

Description	kg	No.
For ROJET 40/100 - 50/120 - 30/130	0.28	<b>7.6187</b>
Spare wide-angle nozzle	0.02	<b>7.6167</b>
For ROJET 85/160	3.10	<b>7.6189</b>
For ROJET 100/200	3.20	<b>7.6166</b>

For ROJET drain cleaning units please see 286 - 289



## Hose Reel, mobile

The mobility and range of use of the ROJET is increased when the hose reel is used. Can easily be used without the help of a second person

- Includes professional cleaning nozzles
- Suitable for all ROJET versions
- Inlet R 1/2"
- Operating pressure 215 bar
- Burst pressure 815 bar

**Optimum cleaning of building interiors and for cleaning domestic drains and downpipes**



No. 7.6118

Set (No. 7.6118) includes: Hose reel with manual crank, shut-off valve and swivel joint, 30 m high-pressure hose DN 8 with coupling R 1/4" (No. 7.2820), drain cleaning nozzle R 1/4" (No. 7.6055)

Description	kg	No.
Hose reel, complete	26.5	<b>7.6118</b>
<b>ACCESSORIES</b>		
Hose reel, inlet 1/2"	17.0	<b>7.6160</b>
30 m high-pressure hose DN 8, R 1/4" coupling	9.40	<b>7.2820</b>
Drain cleaning nozzle R 1/4", without forward jetting	0.04	<b>7.6055</b>
Drain cleaning nozzle R 1/4", with forward jetting	0.04	<b>7.6065</b>
Rotating nozzle R 1/4", 45°	0.08	<b>7.7506</b>

## Down Pipe Nozzle

### High-performance stainless steel nozzle

Can only be used with hose reel (No. 7.6118) or with professional high-pressure cleaner 19/180B (No. 7.6090) in combination with high-pressure hose (No. 7.2820)

- With 3 wide-angle nozzle inserts
- High cleaning performance

**For vertical use in roof drains, ducts and pipes**



No. 7.6154

Description	Coupling	Ø x length mm	kg	No.
Downpipe nozzle	R 1/4"	50 x 125	1.6	<b>7.6154</b>

## Suction Injector

Extends the ROJET's range of use and helps to minimise costs. Can be operated without a separate pump

- Suitable for all ROJET versions
- R 1/2" hose coupling
- Separate pump not necessary
- High suction performance



**Perfectly suited for the suction cleaning of silted channels, drains, grease separators, etc.**



Description	kg	No.
High-pressure R1/2" coupling, with 6 m spiral hose	5.50	<b>7.6191</b>
Spare circular jet nozzle insert	0.01	<b>7.6192</b>